

**Chemically resistant self-priming magnetic drive pumps
which can tolerate abnormal operation**

Main material
CFRETFE



Chemically resistant self-priming magnetic drive pumps which can tolerate abnormal operation



The SMX-F is a horizontal self-priming magnetic drive pump made from fluororesin. Our original self-radiation structure enhances resistance to dry running, cavitation, and closed-discharge operation. In addition, the use of standard motors extends the range of application.



SMX-F543

SMX-F441

SMX-F221



Excellent corrosion resistance

The casings, impeller assembly and magnet capsule are made of fluoro-resin (CFRETFE). Other wet-end parts are made of highly corrosion resistant materials such as carbon, ceramic and the like. The pumps can handle almost type of chemicals including strong acid/alkali.



Expanded versatility

The SMX-F has a modular structure to handle liquids with high specific gravities. Use of standard motors extends the range of liquid application.





Easy maintenance

The pump wet end can be removed from the motor as a complete assembly without dismantling, thanks to an additional rear casing support. The pump wet end comprises the minimum number of parts for easy maintenance.



Enhanced durability under abnormal operation

Our original self-radiation structure efficiently disperses bearing friction heat to protect the pump under abnormal operating conditions. In addition, our non-contact structure prevents contact between rear thrust face and bearing, to eliminate heat buildup during dry running.

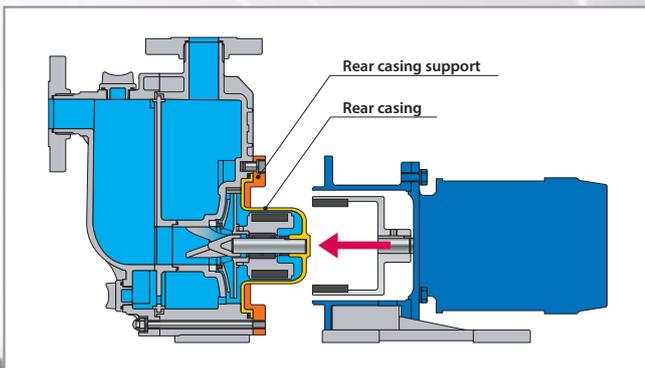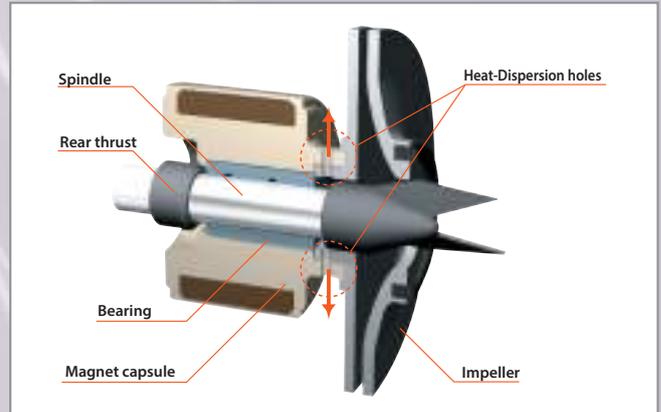

Fast self-priming

The SMX-F requires no external self-priming chambers or valves. The gas-liquid separation design ensures fast self-priming. An exceptional self-priming duration of up to 4m in only 90 seconds is now possible.


Rear casing support

The pump wet end is easily removed from the motor by removal of 4 mounting bolts on the motor bracket. The rear casing support performs easy maintenance and draining of any residual liquid at other place.

Examples of application


Pumping up from underground tank

- Underground tank at chemical plant.
- Underground tank or pit of waste plant.




Pumping up and out from top of tank and tanker truck

- Transferring etching and plating chemical from chemical bath.
- Sucking up chemical from truck.
- Pumping up from top of tank.




Transferring chemical from tank to tank

- Transferring from main tank to daily tank.
- Refilling chemical from drum to tank.

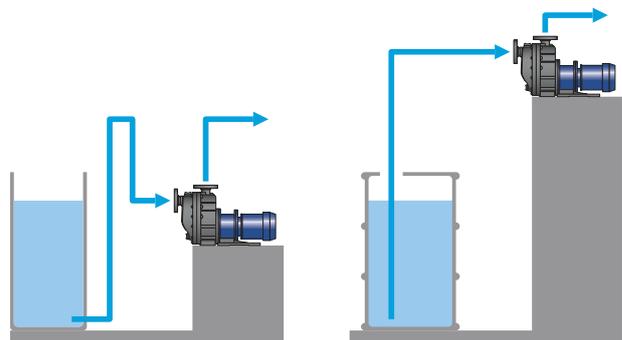

Reliability and performance are enhanced by our unique design

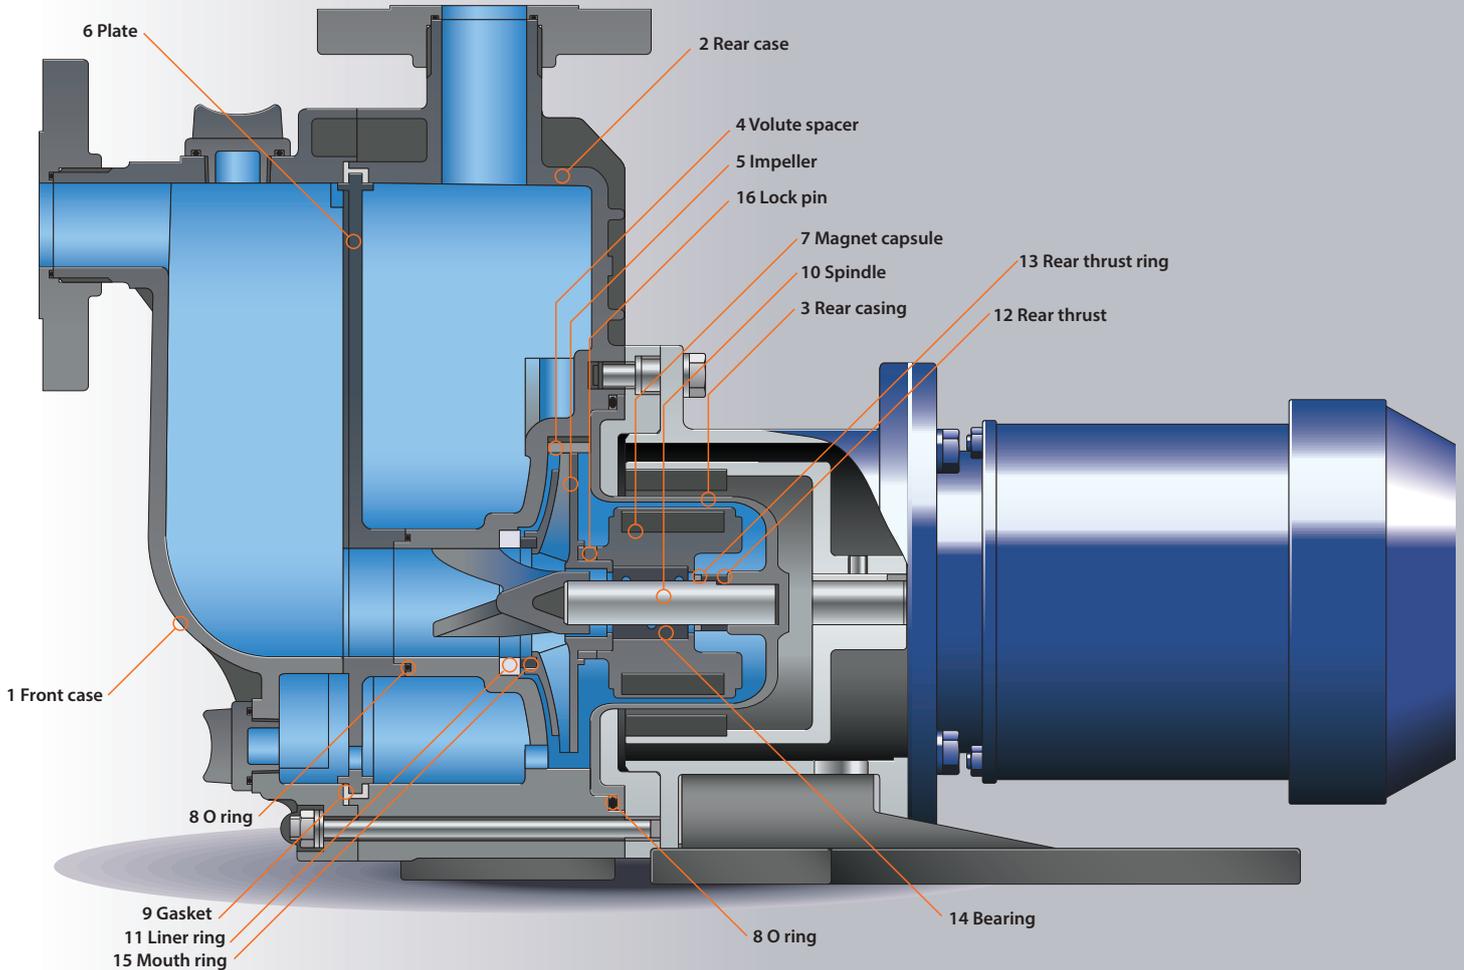

Wet-end materials


Name of part	Model		
	CF	RF	KK
1 Front case			
2 Rear case			
3 Rear casing			
4 Volute spacer		CFRETFE	
5 Impeller			
6 Plate			
7 Magnet capsule			
8 O ring		FKM/EPDM	
9 Gasket			
10 Spindle		High purity alumina ceramic	SiC
11 Liner ring			
12 Rear thrust	SMX-F22, 44 SMX-F54	CFRETFE	
		High purity alumina ceramic	SiC
13 Rear thrust ring	Note2	High purity alumina ceramic	-
14 Bearing	High density carbon	PTFE (With filler)	SiC
15 Mouth ring		PTFE (With filler)	
16 Lock pin	Note1	CFRETFE	

Note1 : 54 type only

Note2 : Exclusive for SMX-F22RF, 44RF



Principles of Self-Priming:

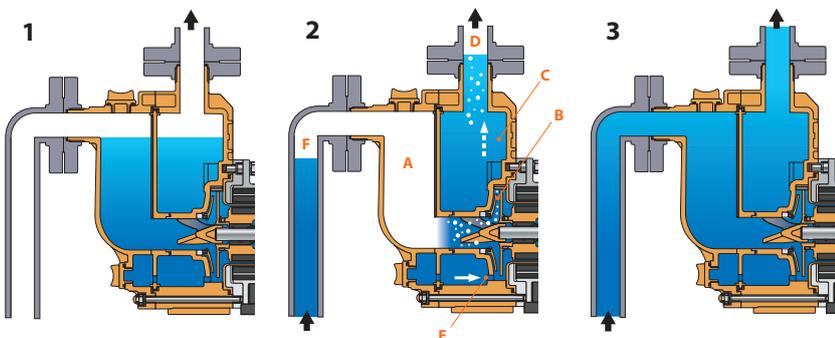

- 1** Prime the pump with liquid.
- 2** On starting, the pump will suck both gas and liquid into its inlet. This mixture moves through front case **A** to the front casing, where it is agitated by the impeller. The mixture is discharged through pump chamber **B** to rear case **C**, where gas and liquid separation then occurs. Gas is bled from the discharge port **D** while some liquid is retained. Liquid in the rear case **C** is fed back through circulation hole **E** to the front casing, where it is again mixed with entrained gas by the impeller. This recirculation & bleeding process continues until gas from the suction side **F** is completely expelled.
- 3** Once all gas is expelled, normal centrifugal pump operation is resumed. Sufficient liquid remains in the casing for subsequent self-priming once the pump is stopped.

Specifications

Model	Connection Suction×Discharge	Impeller	Cycle (Hz)	Min. capacity (L/min)	Standard specification (L/min-m)	Max. capacity (L/min)	Motor (kW 2P)	Resisting pressure limit (MPa)	Mass (kg)
SMX-F220	25A×25A	V	50	10	80 - 7.5	125	0.4	0.28	23
		Y	60		80 - 6.8	90			
SMX-F221		T	50		100 - 12.5	115	0.75		
		V	60		80 - 7.5	125			
		X			100 - 12.0	115			
SMX-F222		Y	60		80 - 6.8	130	1.5		
	T	50	100 - 12.5	155					
SMX-F441	40A×40A	X	60	10	100 - 12.0	160	0.75	0.33	34
		T	50		100 - 13.5	135			
SMX-F442		Y	60		150 - 10.6	220	1.5		
		T	50		150 - 11.8	280			
		X	60		200 - 17.0	340			
Y		150 - 10.6			280				
SMX-F443	X	60	200 - 17.0	340	2.2	47			
SMX-F542	50A×40A	V	50	20	100 - 19.8	155	1.5	0.40	52
		T			250 - 16.0	440			
SMX-F543		V	60		200 - 16.0	410	2.2		56
		Z			250 - 18.0	420			
SMX-F545		T	50		250 - 16.0	440	3.7		74
		V			200 - 16.0	410			
	X	60	300 - 24.0	520					
	Y		300 - 21.0	500					
Z	250 - 18.0	420							

• The self-priming height limit noted above refers to a liquid equivalent to fresh water at 20°C. The self-priming height limit varies with the liquid temperature and the type of liquid.

• Temperature range of handled liquid: 0 to 80°C (The self-priming height limit decreases at high temperatures.)

• Mass weight includes a outdoor motor.

Pump identification

SMX-F 22 0 CA V V C

① ② ③ ④ ⑤ ⑥ ⑦

① **Series symbol**
SMX-F : CFRETFE type

② **Pump size (Suction×Discharge)**
22 : 25A×25A
44 : 40A×40A
54 : 50A×40A

③ **Motor output**
0 : 0.4kW
1 : 0.75kW
2 : 1.5kW
3 : 2.2kW
5 : 3.7kW

④ **Materials of Bearing / Spindle / Liner ring**
CF : High density carbon / High purity alumina ceramic / High purity alumina ceramic
RF : PTFE (with filler) / High purity alumina ceramic / High purity alumina ceramic
KK : SiC/SiC/ SiC


⑤ **Materials of O-ring**
V : FKM
E : EPDM

⑥ **Impeller**
T, V : 50Hz
X, Y, Z : 60Hz

⑦ **Motor specifications**
No symbol : TFEC indoor
C : TFEC outdoor
A : Increased safety type, outdoor (Except SMX-F443)

Note: All combination of impeller and motor size are not available. Please contact Iwaki for detail.







Dimensions in mm

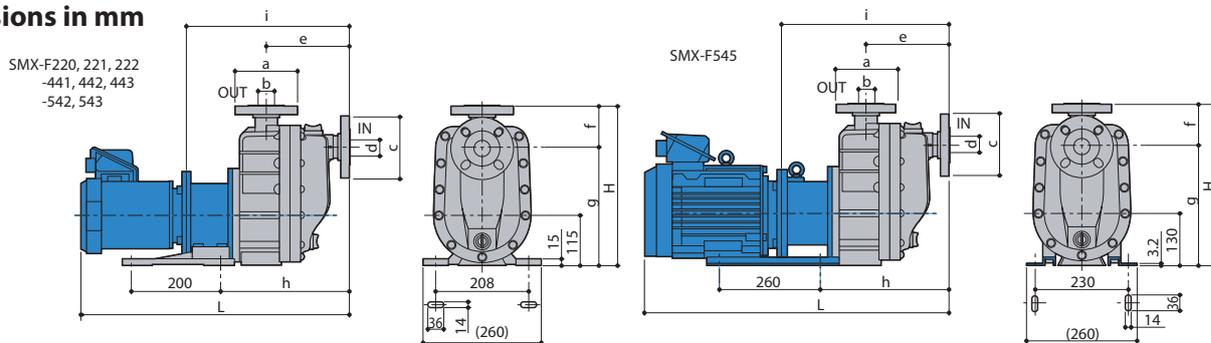

Model	(H)	(L)	a	(b)	c	(d)	(e)	(f)	g	(h)	(i)	j
SMX-F220		539									308	
SMX-F221	329	556	Ø125	Ø25	Ø125	Ø25	162	74	255	240	320	115
SMX-F222		605									332	
SMX-F441		602									366	
SMX-F442	364	651	Ø140	Ø40	Ø140	Ø40	188	93	271	285	378	115
SMX-F443		680										
SMX-F542		661									388	
SMX-F543	390	690	Ø140	Ø40	Ø155	Ø50	204	100	289	310	388	130
SMX-F545		734									408	

Note: The dimensions may differ with the type of motor installed.

Performance curves

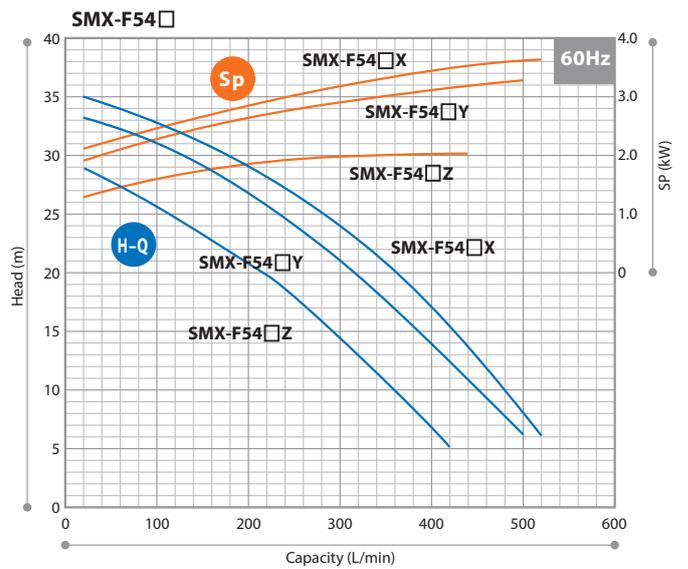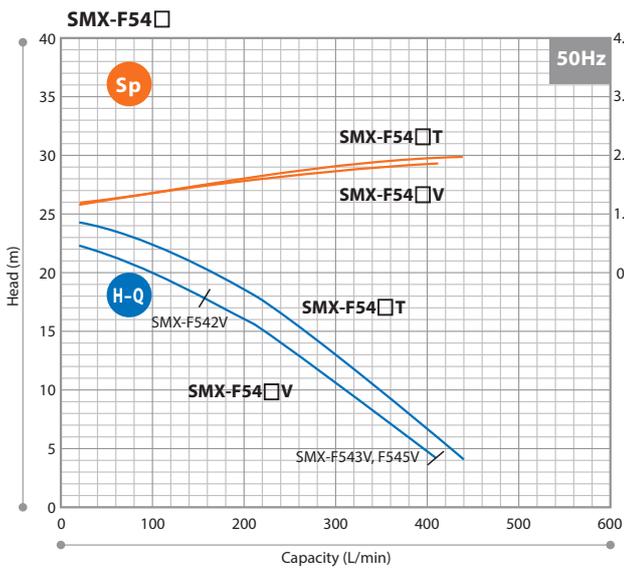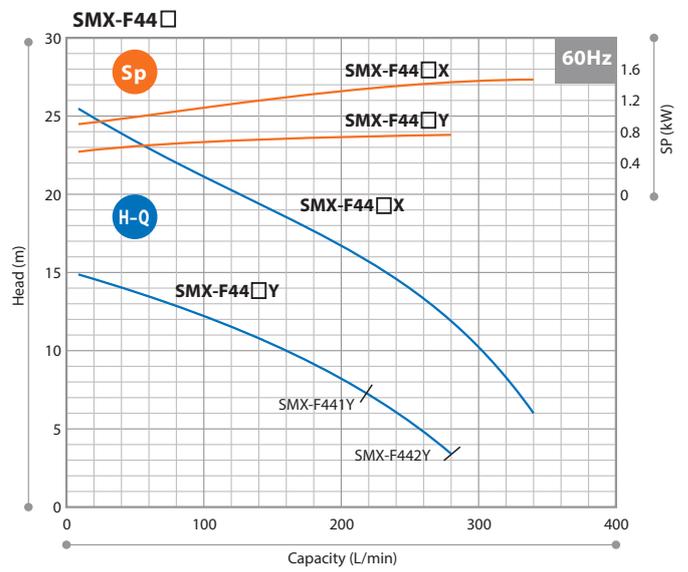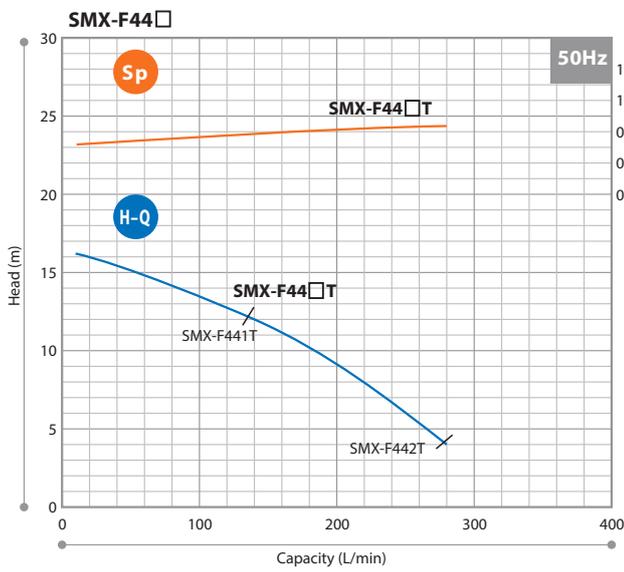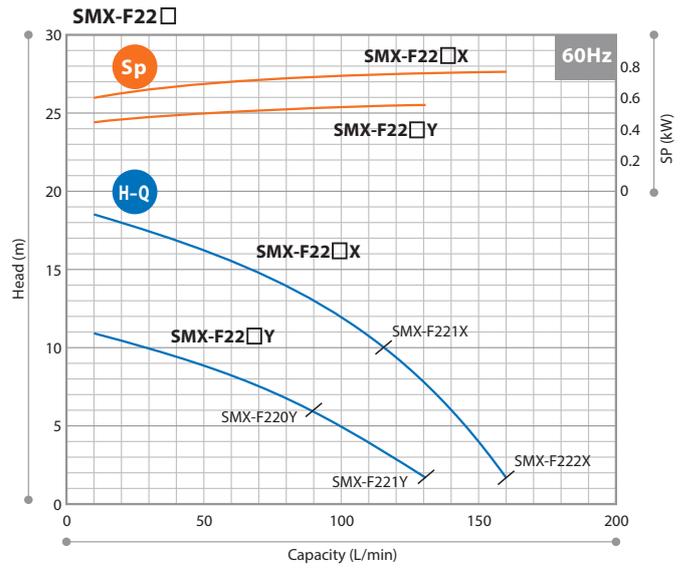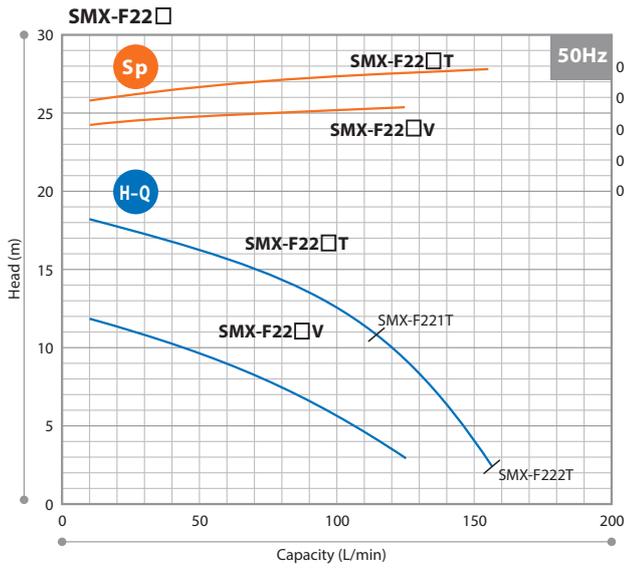


• The shaft power curves shown above are calculated by using our standard test motor. Contact us for detail.

Precautions on the selection of pumps

- The performance curves on this catalogue are based on the operation with 20°C clean water in flooded suction. Keep a margin (3% of the curves) when selecting the pump.
- The magnetic pump cannot run continuously with a closed-discharge. Be sure to observe the minimum flow rate.
The minimum flow rate SMX-F22□: 10L/min
SMX-F44□: 10L/min
SMX-F54□: 20L/min
- Select a pump model according to liquid specific gravity. Always keep 10% allowance to motor output.
Pump shaft power $S_p \times$ Specific gravity $\times 1.1$ (margin) \leq Motor output
- The self-priming performance (4m in 90 seconds) is based on the operation with 20°C clean water on the right piping condition. Self-priming performance varies with liquid temperature, characteristics and piping conditions. Obtain a rough guide of the highest possible self-priming height at each liquid specific gravity by the following formula.
The highest possible self-priming height[m] = Self-priming height with clean[m] / Liquid specific gravity

Self-priming considerations

- The diameter of the piping on the suction side should be the same as that of the pumps inlet port.
SMX-F22□: 25mm
SMX-F44□: 40mm
SMX-F54□: 50mm
and the length of the piping should be limited to less than 4.7m. A larger pipe diameter or longer piping could adversely affect the self-priming performance, or could even hinder the self-priming process itself.
- In cases where the liquid level fluctuates, take the height from the lowest liquid level as the maximum self-priming height.
- Always perform priming before first operation, and start the pump only after the pump chamber has been filled with the handled liquid.
- To prevent early deterioration, avoid frequent start/stop of the pump.
- If a foot valve is installed on the suction pipe, pipe resistance may increase so that the pump cannot suck liquid enough.
- When installing a check valve, install an air vent line to release the air.
- Pipe support
If piping weight loads the pump, plastic parts are deformed. Be sure to install a pipe support.

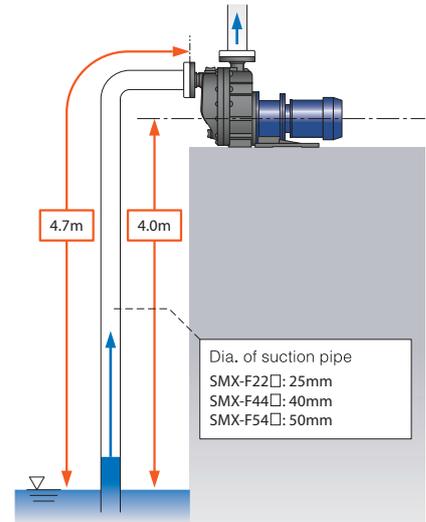

Optional accessories

Iwaki pump protector DRN series

Detects unusual pump operating conditions including dry-running and overload

The DRN model protects equipment (including pumps) from damage!
Minimizes production downtime.
Identifies possible causes of alarms so they can be investigated and addressed.



- Multiple Input: Two analog, one digital, one temperature input and one current input
- Easy operation: Equipped with EASY setup mode to remember the operation status and set the lower/upper limit values, as well as AUTO setup mode
- Bar graph: Visible indication of current operating status
- Logging capability: Data log feature for preventative maintenance scheduling
- Communication: RS485 external communication capability

Specifications

Model	DRN-01	DRN-02
Amperometric range	0.5-30.00A	5.0-200.0A
Unit's source voltage	AC100-240V 50/60Hz 10VA	
Operating temperature	0-40°C	
Operating humidity	35-85%RH	

IWAKI CO., LTD. 6-6 Kanda-Sudacho 2-chome Chiyoda-ku Tokyo 101-8558 Japan TEL : (81)3 3254 2935 FAX : 3 3252 8892 IWAKI has global net work. Please find your distributor location at www.iwaki pumps.jp

European Headquarter : IWAKI Europe GmbH	TEL: (49)2154 9254 0	FAX: 2154 9254 48	U.S.A. : IWAKI America Inc.	TEL: (1)508 429 1440	FAX: 508 429 1386
Germany : IWAKI Europe GmbH	TEL: (49)2154 9254 50	FAX: 2154 9254 55	Argentina : IWAKI America Inc. (Argentina Branch)	TEL: (54)11 4745 4116	
The Netherlands : IWAKI Europe GmbH (Netherlands Branch)	TEL: (31)74 2420011	FAX: (49)2154 925448	Brazil : IWAKI Do Brazil Comercio De Bombas Hidraulicas LTDA.	TEL: (55)19 3244 5900	FAX: 19 3244 5900
Italy : IWAKI Europe GmbH (Italy Branch)	TEL: (39)0444 371115	FAX: 0444 335350	Singapore : IWAKI Singapore Pte Ltd.	TEL: (65)6316 2028	FAX: 6316 3221
Spain : IWAKI Europe GmbH (Spain Branch)	TEL: (34)93 37 70 198	FAX: 93 47 40 991	Indonesia : IWAKI Singapore (Indonesia Office)	TEL: (62)21 6906606	FAX: 21 6906612
Poland : IWAKI Europe GmbH (East Europe Branch)	TEL: (48)12 347 0755	FAX: 13 67 20 30	Malaysia : IWAKIm Sdn. Bhd.	TEL: (60)3 7803 8807	FAX: 3 7803 4800
Belgium : IWAKI Belgium N.V.	TEL: (32)13 67 02 00	FAX: 12 347 0900	Australia : IWAKI Pumps Australia Pty Ltd.	TEL: (61)2 9899 2411	FAX: 2 9899 2421
Denmark : IWAKI Nordic A/S	TEL: (45)48 24 2345		China (Hong Kong) : IWAKI Pumps Co., Ltd.	TEL: (852)2607 1168	FAX: 2607 1000
Finland : IWAKI Suomi Oy	TEL: (358)9 2745810		China (Guangzhou) : GFTZ IWAKI Engineering & Trading Co., Ltd.	TEL: (86)20 84350603	FAX: 20 84359181
France : IWAKI France S.A.	TEL: (33)1 69 63 33 70	FAX: 1 64 49 92 73	China (Shanghai) : IWAKI Pumps (Shanghai) Co., Ltd.	TEL: (86)21 6272 7502	FAX: 21 6272 6929
Norway : IWAKI Norge AS	TEL: (47)23 38 49 00		Korea : IWAKI Korea Co., Ltd.	TEL: (82)2 2630 4800	FAX: 2 2630 4801
Sweden : IWAKI Sverige AB	TEL: (46)8 511 72900	()Country codes	Taiwan : IWAKI Pumps Taiwan Co., Ltd.	TEL: (886)2 8227 6900	FAX: 2 8227 6818
			Thailand : IWAKI (Thailand) Co., Ltd.	TEL: (66)2 322 2471	FAX: 2 322 2477

Caution for safety use: Before use of pump, read instruction manual carefully to use the product correctly. Actual pumps may differ from the photos. Specifications and dimensions are subject to change without prior notice. For further details please contact us.

Legal attention related to export. Our products and/or parts of products fall in the category of goods contained in control list of international regime for export control. Please be reminded that export license could be required when products are exported due to export control regulations of countries. The posting and copying from this catalogue without permission is not accepted firmly.